

### GENERAL PRODUCT INFORMATION:


This product is suitable for wet locations.

Refer to product specsheet for dimming information.

#### CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

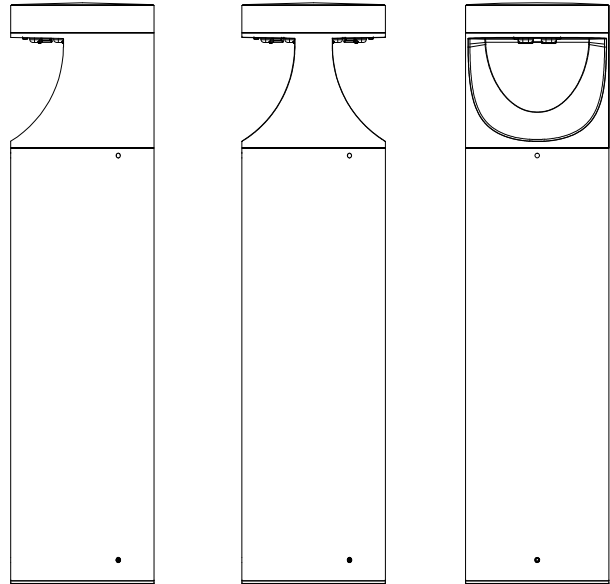


## Prepare the Fixture

**1A**

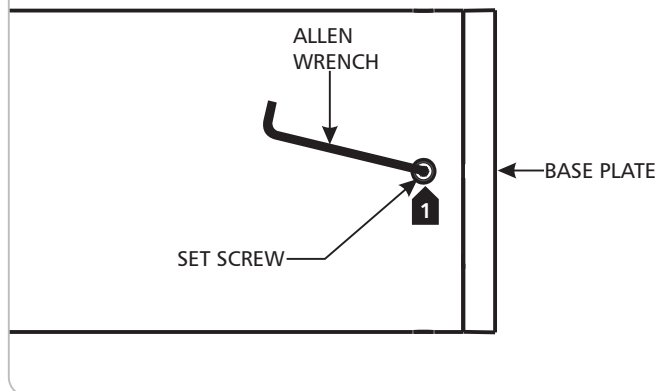

- 1** Loosen (**Do Not Remove**) the set screws on fixture base with the provided Allen wrench and remove the base plate.


**1B**

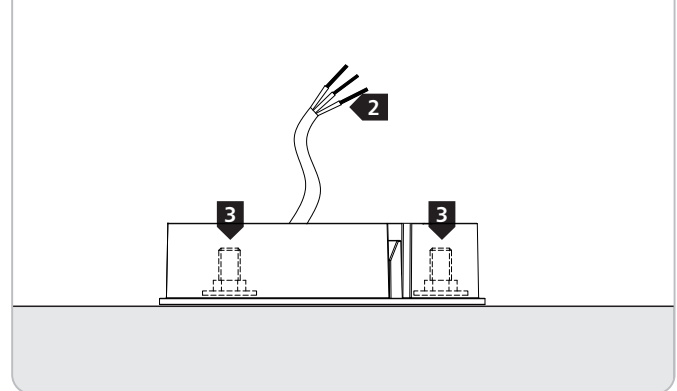

- 2** Bring the power wires to the fixture location in accordance with local electrical codes.
- 3** Mount the base plate to an even and smooth surface using the provided template on page 4.


## Wire the Fixture

2A

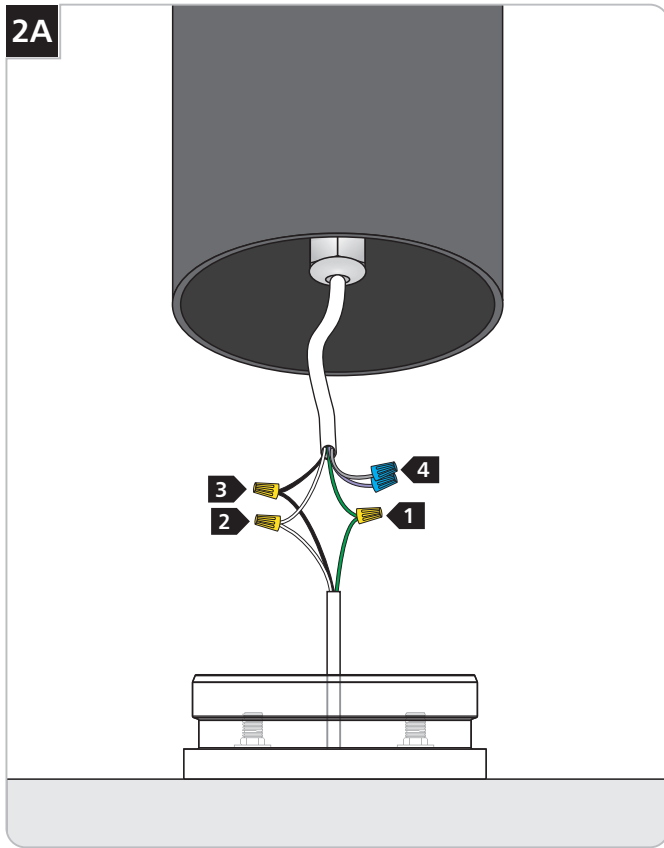

- 1 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 2 Connect the white fixture wire to one of the low-voltage power line wires with a wire nut.
- 3 Connect the black fixture wire to the remaining low-voltage power line wire with a wire nut.
- 4 Use the gray and purple dimming wires for 1-10v dimming application (if not in use, make sure to cap these wires off).

2B

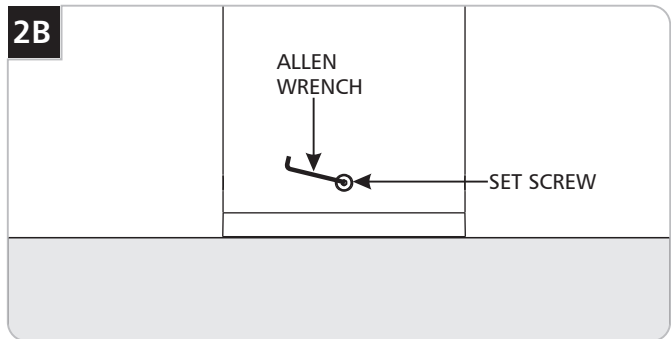


- 5 Carefully install the fixture onto the base plate and secure it in place by tightening all set screws.

**Warning:** The purple and gray wires are only used for 1-10v dimming. For all other applications, do not connect the gray and purple wires.

# LT-BL BOLLARD MOUNTING PLATE TEMPLATE

**WARNING:** If printing this template, ensure printer settings are set to actual size.

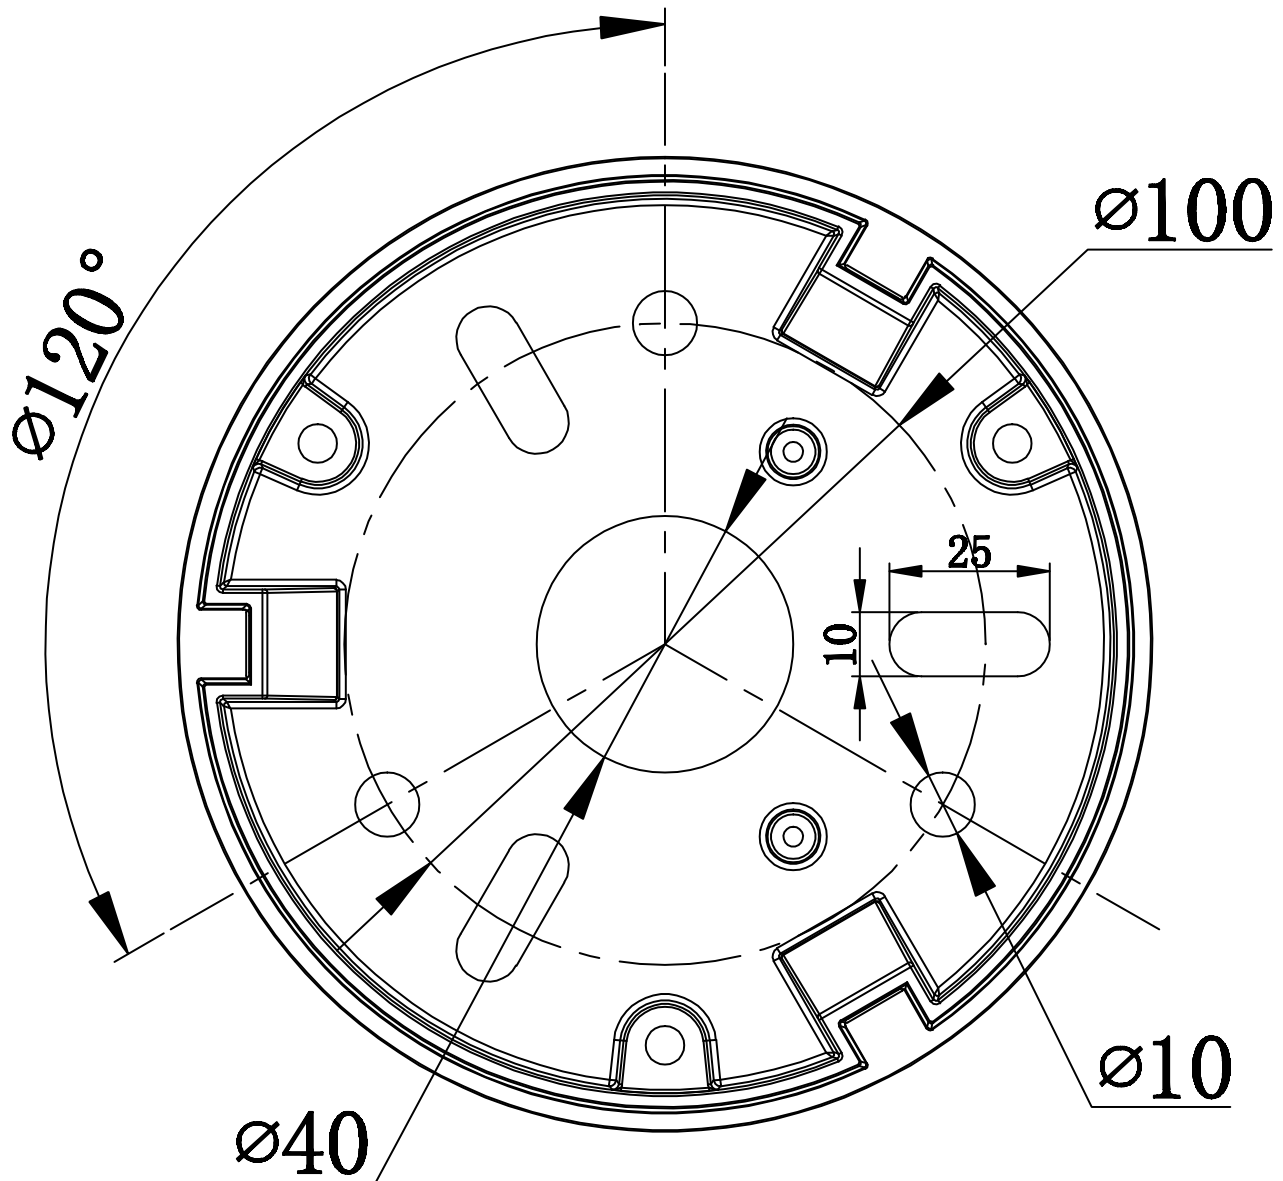

## Concrete Pour Kits for Bollard Landscape Accessory

(Non-standard configuration, need to be purchased separately)

