


CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

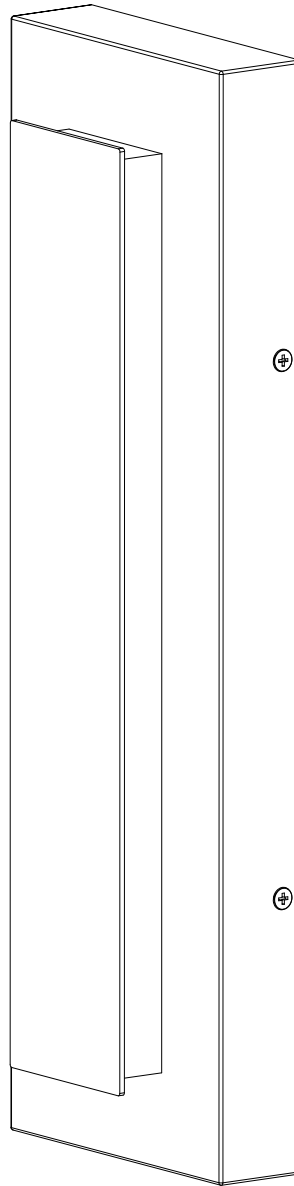

Install the Fixture

1A

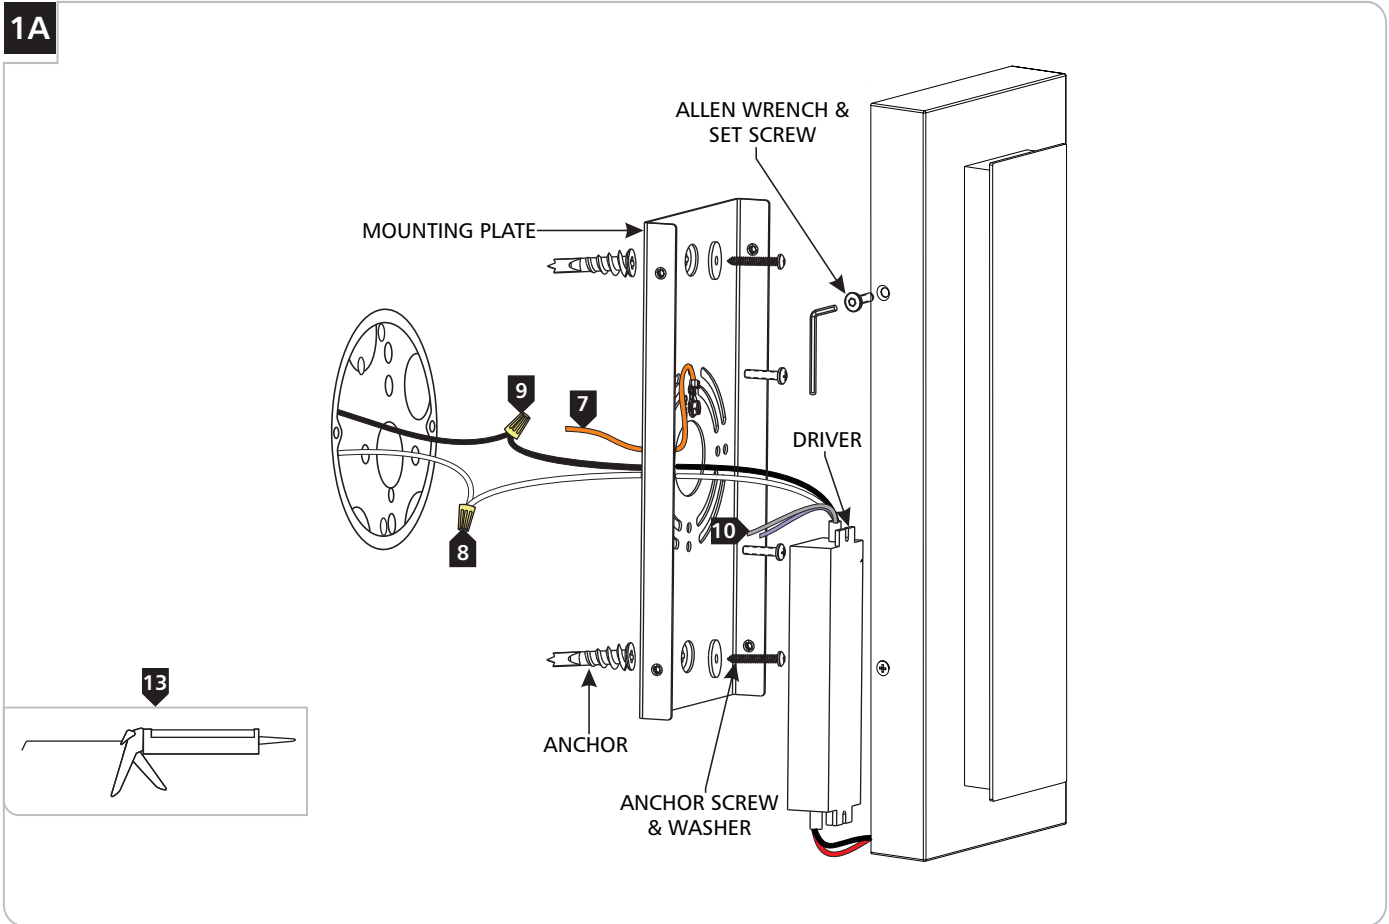

- 1 With the provided Allen wrench, remove the set screws both sides of the fixture base.
 - 2 Remove the mounting plate from the fixture base
 - 3 Install the mounting plate to the junction box with the two #8-32 screws provided.
 - 4 Verify that the mounting plate is level before continuing. Line up an anchor tip with the center of an anchor hole, and push the anchor into the wall up to the threads.
 - 5 Screw the anchor in the rest of the way with a Phillips-head screwdriver. Repeat for the other anchor hole.
 - 6 Slide an anchor screw through a washer, and screw it into an anchor to secure the fixture base to the wall.
 - 7 Connect the fixture to a suitable ground in accordance with local electrical codes.
 - 8 Connect the white driver wire to the neutral power line.
 - 9 Connect the black driver wire to the hot power line.
 - 10 Use the gray and purple dimming wires for 0-10v dimming application (if not in use, make sure to cap these wires off). Warning: The purple and gray wires are only used for 0-10v dimming. For all other applications, do not connect the gray and purple wires.
 - 11 European version:
 - 12 Connect the blue driver wire to the neutral power line.
 - 13 Connect the red driver wire to the hot power line.
- Properly place the driver, all wires, and wire nut connections into the fixture base.
- Mount the fixture back onto the mounting plate and reinstall the set screw (reversal of step 1A).

For wet locations, caulk around the fixture base with waterproof construction sealant.

SAVE THESE INSTRUCTIONS!