



LI-TIAN LIGHTING

Type:

Model:

Project:

LT-SL series

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast ADC12 aluminum. Optic and driver compartment separately sealed while being electrically connected.

FINISH:

Durable powder coat finish available in Black, Architectural Bronze, Custom Powder coat finishes available on request.

LED:

Bridgelux® COB driven CRI >80 or 90.

COLOR TEMPERATURE:

LED's are offered in 2700°K, 3000°K, 3500°K, 4000°K, or 5000°K

LIGHT DISTRIBUTION:

Very Narrow Spot (15°-18°), Narrow Spot (19°-23°), Medium Flood (27°-36°), and Wide Flood (55°-60°).

REFLECTOR:

High-purity, vacuum Polycarbonate, specular or semi-specular optics designed for maximum performance and uniformity. LT-SL (30W-40W) optic incorporates an internal source Light guide column to eliminate unwanted glare outside the beam pattern.

LENS/SEAL:

3.0 mm thick tempered clear glass

WIRING:

Prewired with 150° C-rated wire. Integral CUL/CE listed LED driver, either non-dimmable. Multi-Volt 120V-277V or 220V-240V driver input standard (Optional AC12V-24V).

ACCESSORIES:

13 installation options available

MOUNTING:

Infinity Knuckle - Die-cast, copper-free aluminum, with 1/2" NPT thread. A fully sealed spherical grommet allows infinite adjustment capabilities.



LT-SL -10/15/20W



LT-SL -30/40/60W



Type:


Model:

Project:

LI-TIAN LIGHTING

Product number	Power	No./Module	Lumens	CCT/Ra	Input voltage	Beam angle	weight	
LT-SL-10W	10W	CREE/COB	1000	3000-5000K Ra>80 Ra>90	AC12-24V AC220-240V AC120-277V	15°-18° 19°-23° 27°-36°	1kg	
LT-SL-15W	15W		1500					
LT-SL-20W	20W		2000					
LT-SL-30W	30W		3000			15°-18° 19°-23° 27°-36° 55°-60°		2.1kg
LT-SL-40W	40W		4000					
LT-SL-60W	60W		6000					

★ Lumen test results based on 5000K color temperature

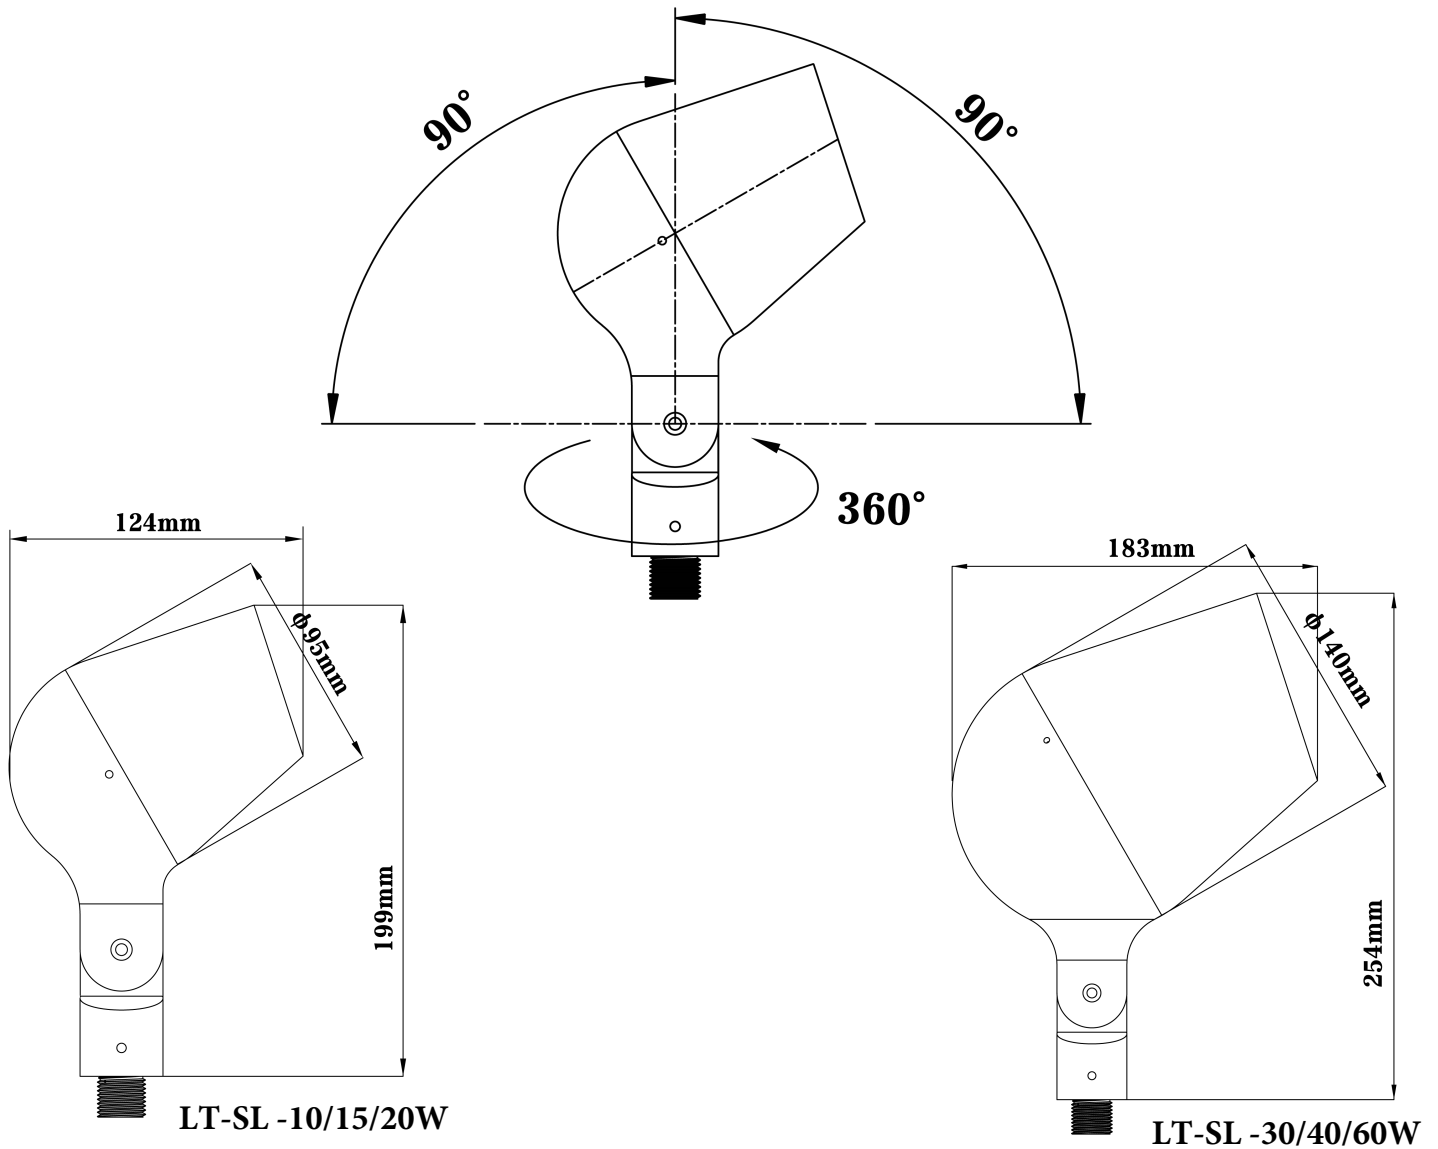

Installation accessories:



Mounting Stake



Surface Base JB



Surface Base SB



Large Tree Mount Canopy (Webbing)



Stainless steel tree ring



Pole coupler
Suitable for ϕ 60-200mm pole



Pole installation (Single)
Suitable for ϕ 102mm pole



Pole installation (Double)
Suitable for ϕ 102mm pole





Candlestick-1
Suitable for ϕ 60/76mm pole



Candlestick-2
Suitable for ϕ 60/76mm pole















Candlestick-3
Suitable for ϕ 60/76mm pole




Sign light accessories
L:12" 24" 36" ϕ :1"

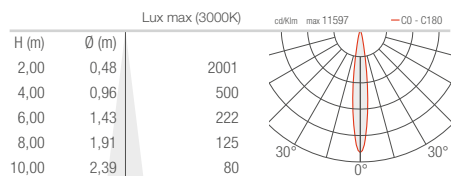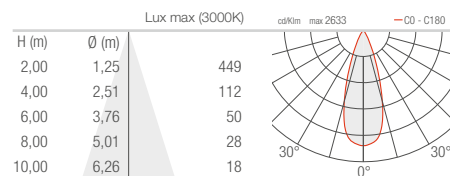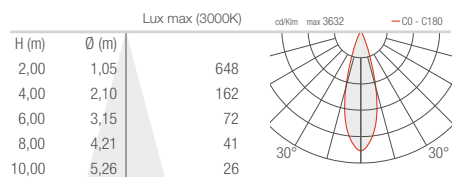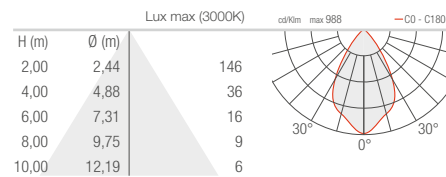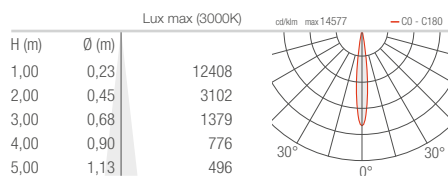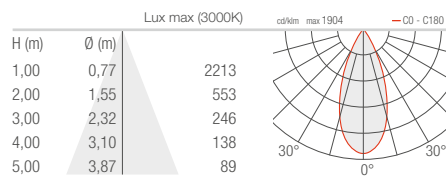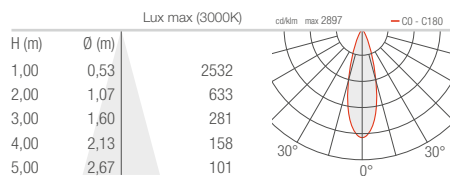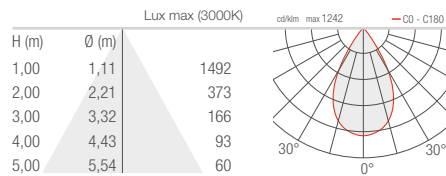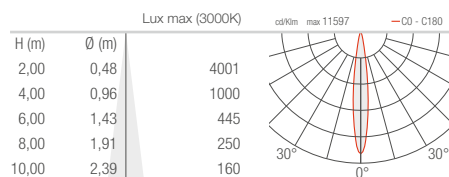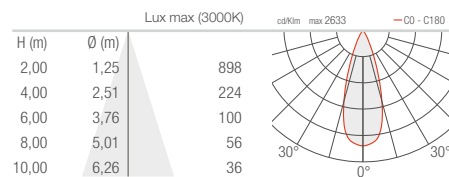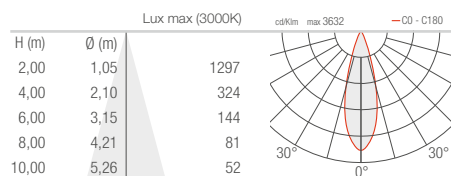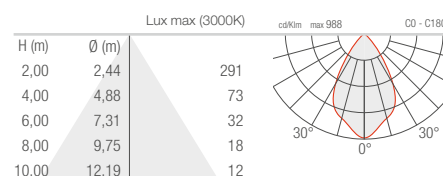


LT-SL-10W-3000K
S - 15° CRI 90

L - 36° CRI 90

M - 20° CRI 90

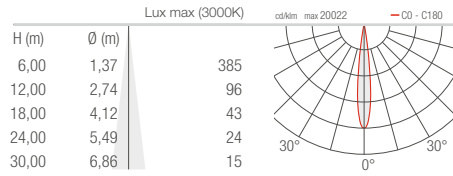K - 60° CRI 90

LT-SL-15W-3000K
S - 15° CRI 90

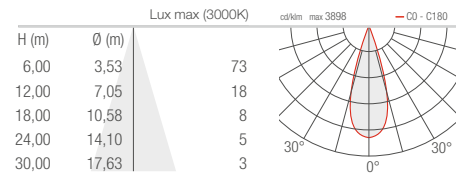L - 36° CRI 90

M - 20° CRI 90

J - 60° CRI 90

LT-SL-20W-3000K
S - 15° CRI 90

L - 36° CRI 90

M - 20° CRI 90

K - 60° CRI 90


LT-SL-30W-3000K


S - 15° CRI 90



M - 23° CRI 90




L - 36° CRI 90

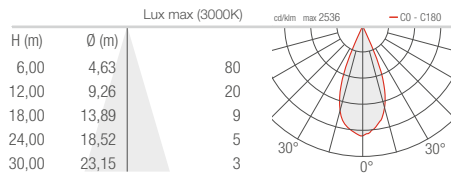


LT-SL-40W-3000K

S - 15° CRI 90

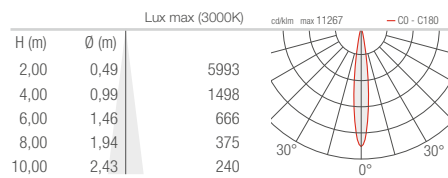

M - 23° CRI 90

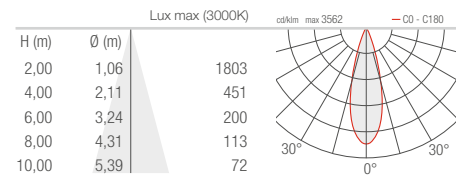

L - 36° CRI 90

