


Strikingly elegant in its simplicity, LT-CL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round in three sizes.

Outstanding protection against the elements:

- Powder coat finish
- Stainless Steel mounting hardware
- IP65 rated

SPECIFICATIONS

LUMENS	1286
WATTS	12
VOLTAGE	Universal 120-277V, with integral transient 1kV surge protection (driver)
DIMMING	0-10, ELV, Triac(option)
LIGHT DISTRIBUTION	Symmetric:15/24/36°
OPTICS	Reflecting cup
MOUNTING OPTIONS	Wall
ADJUSTABILITY	None
CCT	3000/4000/5000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U4-G0
DARK SKY	Non-Compliant
WET LISTED	IP65
START TEMP	-20°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70: >60,000 Hours
WARRANTY*	5 Years

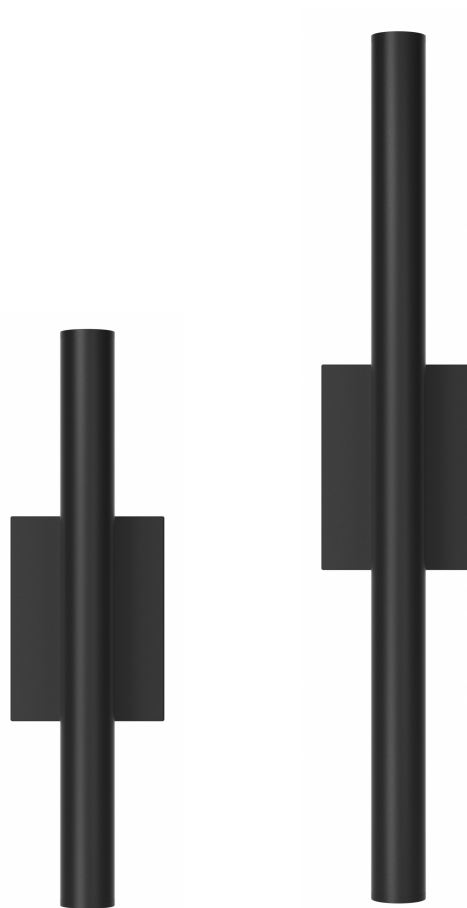


LT-CL-44

LT-CL-66

ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	FINISH	FUNCTION	VOLTAGE	DISTRIBUTION
LT-CL-44	830 80CRI, 3000K	44 440mm	B BLACK	UD UPLIGHT/DOWNLIGHT	UNV 120V-277V	S 15°
LT-CL-66	840 80CRI, 4000K	66 660mm				M 24°
	850 80CRI, 5000K					L 36°

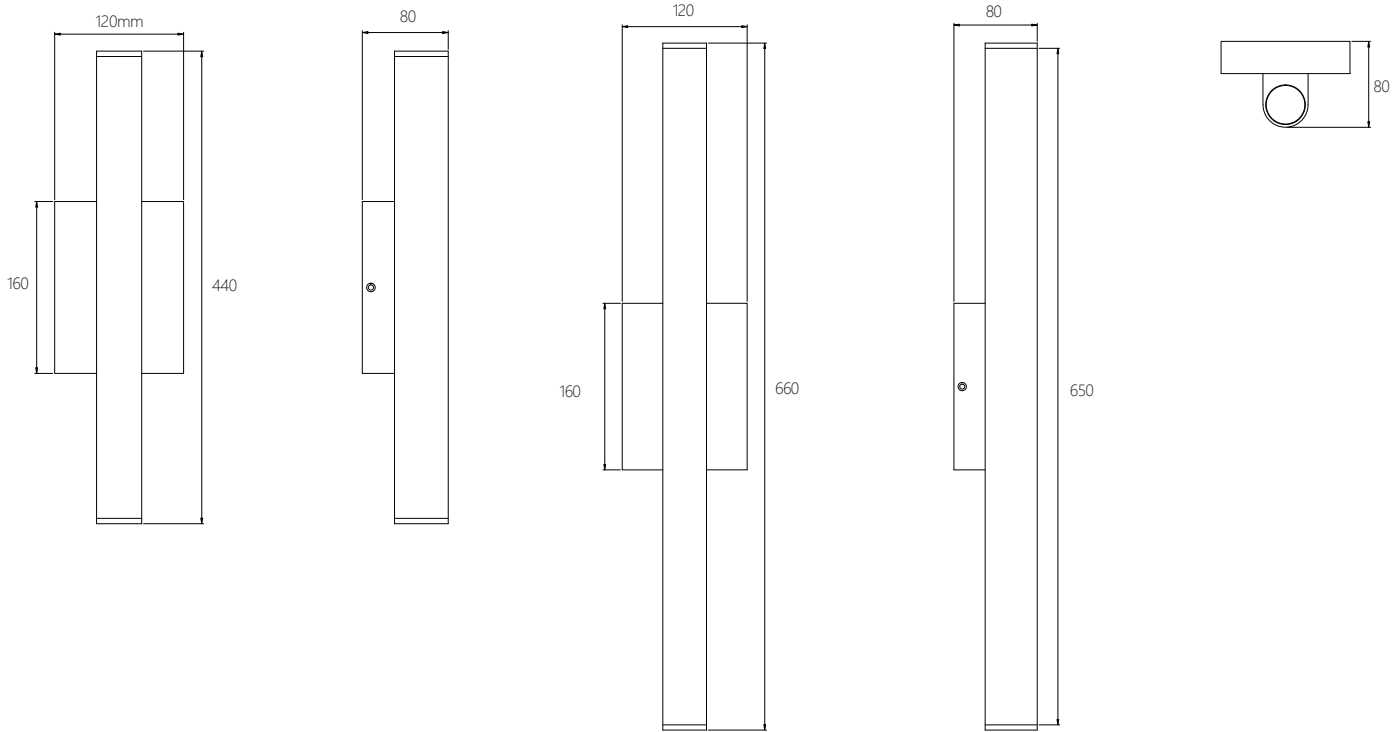

PHOTOMETRICS*

Total Lumen Output: 1286
 Total Power: 11.8
 Luminaire Efficacy: 109
 Color Temp: 3000K
 CRI: 80+
 BUG Rating: B1-U4-G0

