


Strikingly elegant in its simplicity, LT-WL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use.

### Outstanding protection against the elements:

- Powder coat finish
- Stainless Steel mounting hardware
- IP65 rated

### SPECIFICATIONS

<b>LUMENS</b>	540/1080
<b>WATTS</b>	6/12
<b>VOLTAGE</b>	Universal 120-277V, with integral transient 1kV surge protection (driver)
<b>DIMMING</b>	0-10, ELV, Triac(option)
<b>LIGHT DISTRIBUTION</b>	Symmetric:15/24/36°
<b>OPTICS</b>	Reflecting cup
<b>MOUNTING OPTIONS</b>	Wall
<b>ADJUSTABILITY</b>	None
<b>CCT</b>	3000/4000/5000K
<b>CRI</b>	80+
<b>COLOR BINNING</b>	3 Step
<b>BUG RATING</b>	B1-U4-G0
<b>DARK SKY</b>	Non-Compliant
<b>WET LISTED</b>	IP65
<b>START TEMP</b>	-20°C
<b>FIELD SERVICEABLE LED</b>	Yes
<b>CONSTRUCTION</b>	Aluminum
<b>HARDWARE</b>	Stainless Steel
<b>FINISH</b>	Powder Coat
<b>LED LIFETIME</b>	L70: >60,000 Hours
<b>WARRANTY*</b>	5 Years




LT-WL-18-6W



LT-WL-50-12W

### ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	FINISH	FUNCTION	VOLTAGE	DISTRIBUTION
LT-WL-18-6W	830 80CRI, 3000K	18 180mm	B BLACK	UD UPLIGHT/DOWNLIGHT	UNV 120V-277V	S 15°
LT-WL-50-12W	840 80CRI, 4000K	50 500mm				M 24°
	850 80CRI, 5000K					L 36°

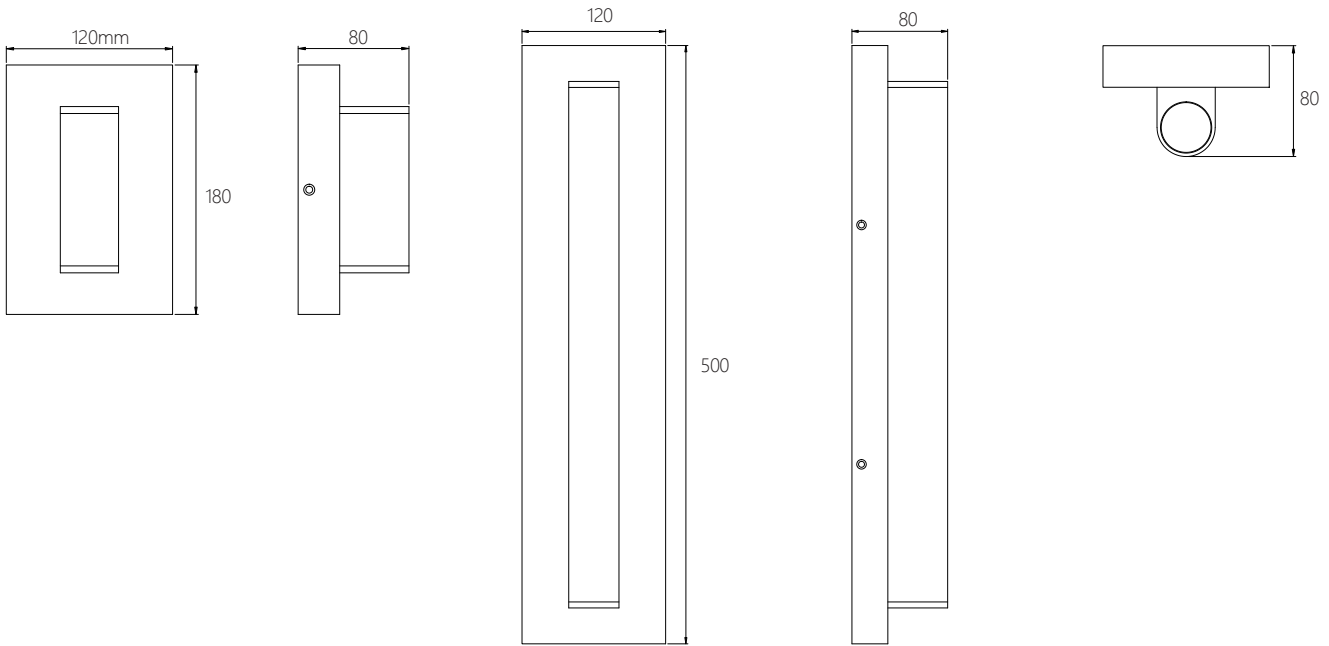

## PHOTOMETRICS\*

Total Lumen Output: 540  
 Total Power: 6  
 Luminaire Efficacy: 109  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U4-G0

