

The indirect light source points back toward a natural Gold finish blade silhouette that reflects the focus of the eye inward. Use this fixture to welcome guests to an outdoor space or doubled to line an entryway or garage.

Outstanding protection against the elements:

- cXYfb`W]gd`bYg`UbX`U'g]a`dfcZ]Y
- @[\hgcI fW`dc]brg`VUW`rck UfX`U`bUH fU`; c`X`Z]b]g\`h`UhfYZYWg`hY`][\hcl h
- bX]fYWi]i a`]bU]cb
- d*)`K`YhfUHfX
- : i`mX]a a UV`Y`]bhY[fUHfX`@98`Ua d
- DfcHYWfX`VmiU`)! mYUf`k`UffUbmt'

SPECIFICATIONS

LUMENS	150/300
WATTS	10/20
VOLTAGE	Universal 120-277V, with integral transient 1kV surge protection (driver)
LIGHT DISTRIBUTION	Indirect illumination
OPTICS	Reflecting cup
MOUNTING OPTIONS	Wall
ADJUSTABILITY	None
CCT	3000/4000/5000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U4-G0
DARK SKY	Non-Compliant
WET LISTED	IP65
START TEMP	-20°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70: >60,000 Hours
WARRANTY*	5 Years




LT-YL-40-10W



LT-YL-60-20W

ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	FINISH	FUNCTION	VOLTAGE	DISTRIBUTION
LT-YL-40-10W	830 80CRI, 3000K	40 400mm	B BLACK	UD UPLIGHT/DOWNLIGHT	UNV 120V-277V	II Indirect illumination
LT-YL-60-20W	840 80CRI, 4000K 850 80CRI, 5000K	60 600mm				

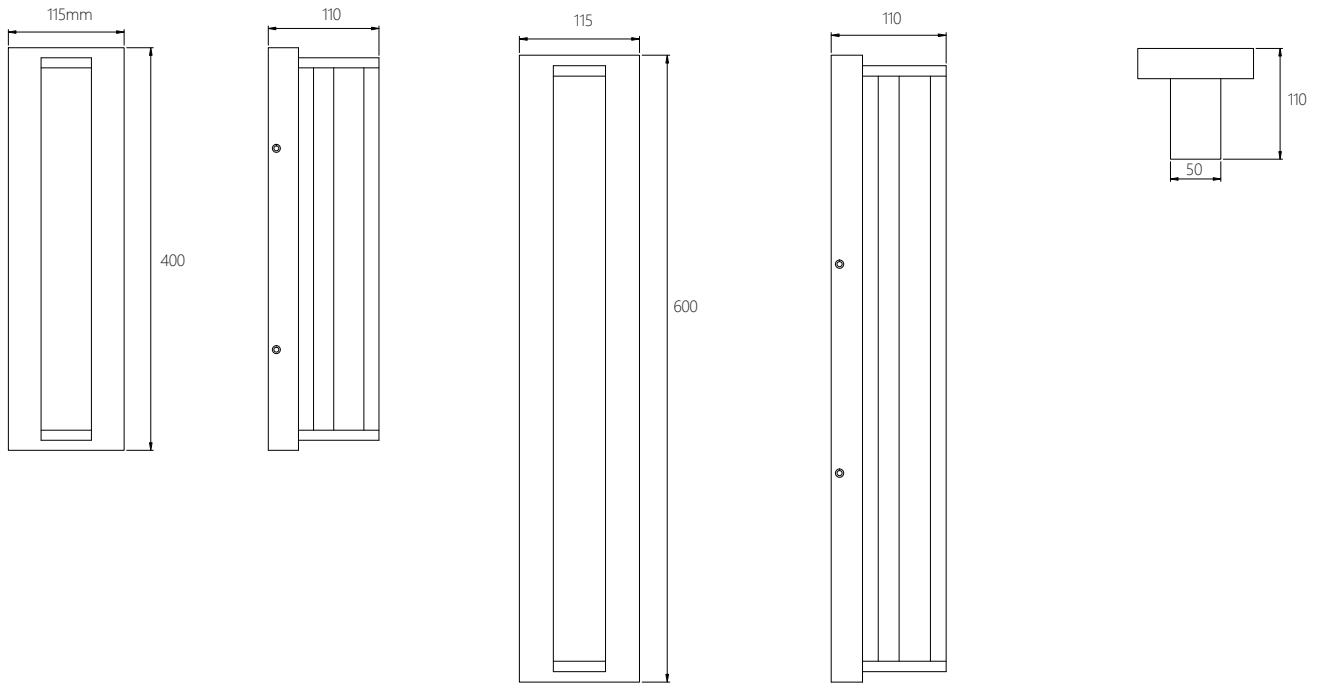

PHOTOMETRICS*

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

