
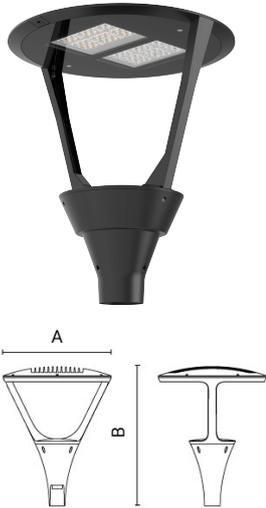


Parasol

LT-DZ



Technical information

Light source:	LED, 3000-5000K, CRI>80
Luminaire efficacy:	120lm/W
Luminaire:	50/70/100W, 6000/8400/12000LM
LED life time:	> 60000h - L80 - B20 (Ta 25°C)
High colour consistency:	< 3 SDCM
Power supply:	220-240V 50/60Hz(120-277V)
Wiring:	ON/OFF
Optics:	type II / III / IV / Type V Square Medium / Type V Wide (Round)
Color:	Aluminium - 21
Fixture Finish:	Black
Size:	A: Ø 452mm B: 542mm
N W:	7.3kg







 0,09m²


Appliance

- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Driver protected against voltage surges.
- PMMA lenses for LEDs.
- Screen made of 5mm thermal-shock resistant tempered glass.

Installation

- Post-top installation (Ø60-76mm reduction).
- Supplied with power cable ended (0.15m) by IP66 socket-plug connector with locking ring for cables of diameter 9-12mm.

Norm

- It complies with standards EN 60598-1 and EN 60598-2-3.

Example: LT-DZ-50W-3-3K8-3-NV

LT-DZ		Nominal Watts		CCT		Distribution		Voltage		Options
Model										
LT-DZ Parasol	50W	6000LM	3K8	3000K, 80 CRI	2	Type II	UNV	120-277V	<ul style="list-style-type: none"> • Twist-lock photocell. • 5-pin wireless photoelectric control for added dimming feature. • 7-pin wireless photoelectric control for for dimming and additional I/O connections for customer use 	
	70W	8400LM	4K8	4000K, 80 CRI	3	Type III	NV	220-240V		
	100W	12000LM	5K8	5000K, 80 CRI	4	Type IV	347	347V		
					4W	Type IV Wide	480	480V		
					5QM	Type V Square Medium	DALI	220-240V		
					5W	Type V Wide (Round)	Consult factory			

Specifications



Urban lighting between versatility and high visual comfort Parasol is the pole top luminaire for urban lighting, featuring a catchy shape and excellent performance, also available with the latest smart lighting technologies. The wide range of street and radial optics makes it a versatile solution, which does not produce light pollution.

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. It complies with standards EN 60598-1 and EN 60598-2-3.

LED sources available in color temperatures 4000K or 5000K

High color consistency < 3 SDCM and LED life time > 60000h - L80 - B20 (Ta 25°C).


System effectiveness, minimum 85lm/W

Luminaire in insulation class II.


DRIVER INCLUDED.

Post-top installation (Ø60mm reduction). Supplied with power cable ended (0.15m) by IP66 socket-plug connector with locking ring for cables of diameter 9-12mm.


ISOFOOT CANDLE PLOT(TYPE II)

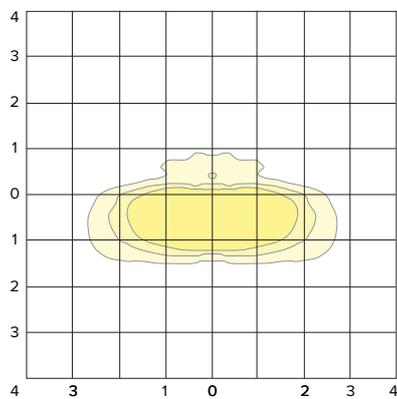

ISOFOOT CANDLE PLOT(TYPE III)

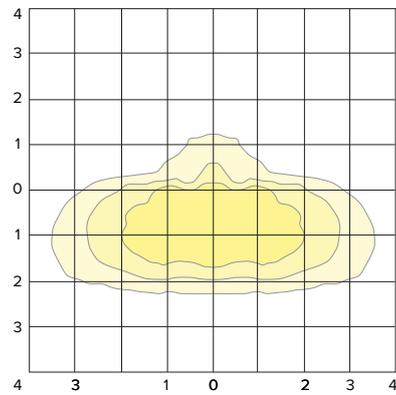


ISOFOOT CANDLE PLOT(TYPE IV)

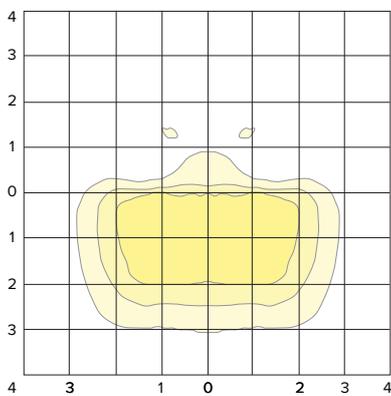

ISOFOOT CANDLE PLOT

Type V Square Medium

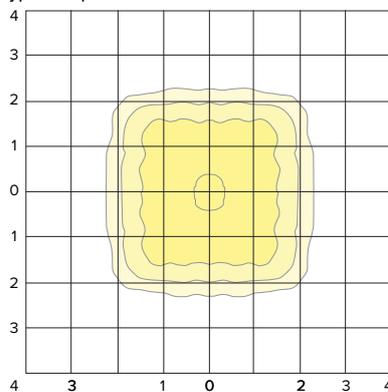

ISOFOOT CANDLE PLOT

(Type V Wide (Round))

