

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.



Install the Fixture

1A

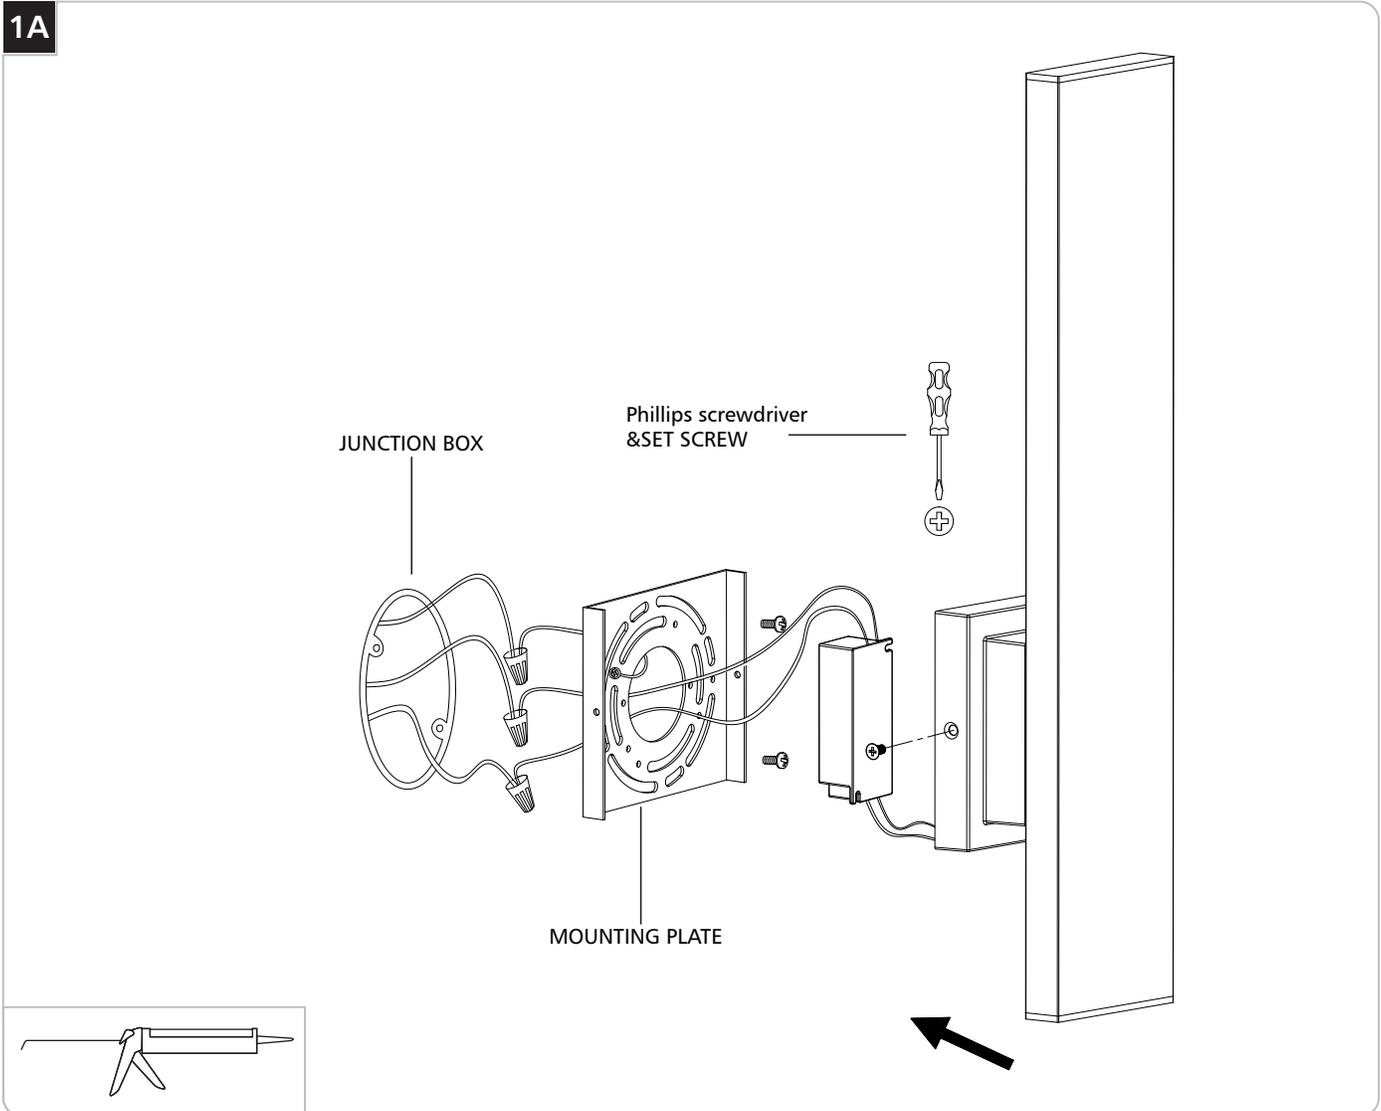

Remove the set screws both sides of the fixture base.

Remove the mounting plate from the fixture base.

Install the mounting plate to the junction box with the two #8-32 screws provided.

Connect the fixture to a suitable ground in accordance with local electrical codes.

Connect the white wire to the neutral power line with a wire nut.

Connect the black wire to the hot power line with a wire nut.

Use the gray and purple dimming wires for 1-10v dimming application (if not in use, make sure to cap these wires off). Warning: The purple and gray wires are only used for 0-10v dimming. For all other applications, do not connect the gray and purple wires.

Properly place all wires and wire nut connections into the junction box, mount the fixture base onto the mounting plate, and secure it in place by reinstalling the set screws using Phillips screwdriver .

For wet locations, caulk around the base of the fixture with waterproof construction sealant.