


The contemporary aesthetic of the LT-WW-18 outdoor wall sconce creates soft indirect, reduced-glare illumination by aiming light back against the wall for accenting architecture as well as for wayfinding.

- Selectable CCT (2700K/3000K)
- Universal 120V-227V
- Outstanding protection against the elements:
  - Wet Listed IP65 Rated
  - Stainless Steel Mounting Hardware
  - Powder Coat Finishes

## **SPECIFICATIONS**

DELIVERED LUMENS	1200		
WATTS	20		
VOLTAGE	Universal 120V-277V		
DIMMING(OPTIONS)	Dimmable with most LED compatible ELV & TRIAC dimmers + 1-10V		
LIGHT DISTRIBUTION	Symmetric		
OPTICS	not applicable		
MOUNTING OPTIONS	Wall		
CCT	2700K/3000K Selectable		
CRI	80+		
COLOR BINNING	3 Step		
WET LISTED	IP65		
START TEMP	-30°C		
FIELD SERVICEABLE LED	No		
CONSTRUCTION	Aluminum		
HARDWARE	Stainless Steel		
HANDWARE	Stalliess Steel		
FINISH	Powder Coat(Black and Bronze)SELECTABLE		
FINISH	Powder Coat(Black and Bronze)SELECTABLE		
FINISH  LED LIFETIME	Powder Coat(Black and Bronze)SELECTABLE L70; >60,000 Hours		

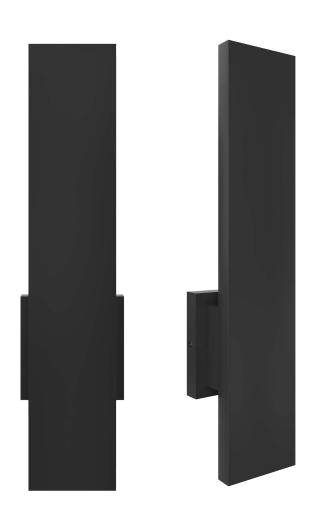

## ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	FINISH	VOLTAGE	OPTIONS
LT-WW-18	<b>802730</b> 80 CRI 2700K/3000K SELECTABLE	<b>18</b> 18"	B BLACK	<b>UNV</b> 120V–277V	<b>DIM</b> 1-10V or ELV(120V)



