

LT-BL Series LED bollard offers an understated, contemporary design that delivers beautiful outdoor lighting while unobtrusively blending with surrounding architecture and landscape details. Asymmetrical light distribution aims light downward creating pools of tightly controlled light, ideal for outdoor path and campus illumination. This timeless outdoor light fixture comes in two marine-grade powder coat finishes: Bronze and Black.

- **Marine-grade powder coat finish and stainless steel hardware**
- **Options: Emergency Back-up, Motion sensor, 1-10V/DALI Dimming, R G B Decorative strip**
- **Wet listed, IP65**

## SPECIFICATIONS

|                       |   |
|-----------------------|---|
| DELIVERED LUMENS      | 960 / 1920  |
| WATTS                 | 12/24   |
| VOLTAGE               | Universal 220-240V(120-277V), with integral transient 2.5kV surge protection (driver) |
| DIMMING(Options)      | 1-10V, ELV, DALI  |
| LIGHT DISTRIBUTION    | asymmetrical  |
| MOUNTING OPTIONS**    | Bolt  |
| CCT                   | 3000K or 4000K/5000K  |
| PERFORMANCE OPTIONS   | Emergency Back-up, Motion sensor, R G B Decorative strip                              |
| CRI                   | 80+   |
| COLOR BINNING         | 3 Step  |
| BUG RATING            | B1-U2-G0  |
| DARK SKY              | Compliant   |
| WET LISTED            | IP65  |
| GENERAL LISTING       | CE  |
| START TEMP            | -30°C   |
| FIELD SERVICEABLE LED | Yes   |
| CONSTRUCTION          | Aluminum  |
| HARDWARE              | Stainless Steel   |
| FINISH                | Marine-Grade Powder Coat  |
| LED LIFETIME          | L70; >60,000 Hours  |
| WARRANTY*             | 3 Years   |



Unilateral





Bilateral

## ORDERING INFORMATION

| PRODUCT | CRI/CCT           | LENGTH | FINISH   | VOLTAGE       | OPTIONS                   |
|---------|-------------------|--------|----------|---------------|---------------------------|
| LT-BL   | 830 80 CRI, 3000K | 250mm  | B BLACK  | UNV 120V-277V | MS Motion sensor          |
|         | 840 80 CRI, 4000K | 600mm  | Z BRONZE | NV 220-240V   | CA R G B Decorative strip |
|         | 840 80 CRI, 5000K | 1000mm |          |               | EM EMERGENCY BACK-UP      |
|         |                   |        |          |               | TG DALI                   |

## Size

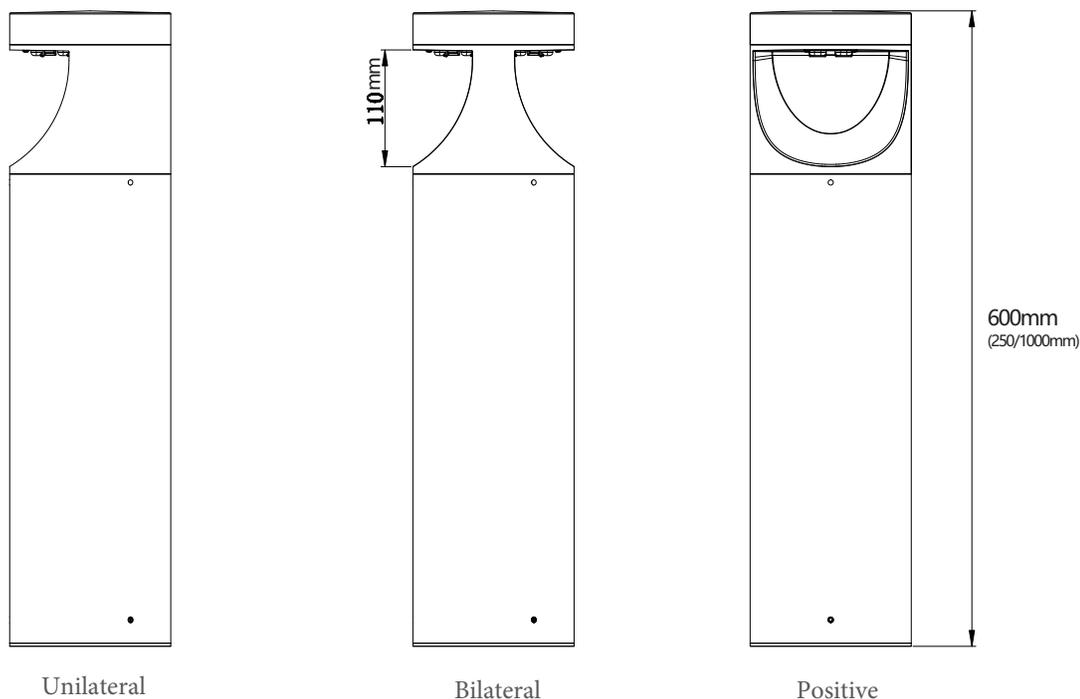

## Light distribution curve

