



LI-TIAN LIGHTING

LED WALLPACK LIGHT

DESCRIPTION

- Dimming standard on 1-10v pwm models
- UV stabilized powder-coated bronze finish
- Enclosure and hardware are corrosion resistant

LISTINGS

- ETL Listed for wet locations(UNDER REVIEW)
- IP65 Rated
- DesignLights Consortium Qualified - meets DLC requirements for efficacy and lumen maintenance(UNDER REVIEW)

LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K, 5000K CCT
- CRI: 70+

ELECTRICAL

- Input voltage: 120-277V or 277-480V
- Power Factor: >.90
- THD: <20%

CONSTRUCTION

- Die-cast aluminum body with traditional HID appearance
- Multiple 1/2" NPS entry points for conduit and accessories
- Fully sealed and gasketed
- Borosilicate tempered glass lens or PC Lens
- -40°F to 104°F (-40°C to 40°C) operating temperature

WARRANTY

- 5 year limited warranty

Glass lens



LT-WPK




LT-WAK




PC Lens



LT-WPK



LT-WAK



APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security



ORDERING INFORMATION



Model	Package	CCT	Voltage	Lens
LT-WPK LT-WAK	30W, 3600LM 50W, 6000LM 60W, 7200LM 100W, 12000LM 120W, 14400LM	40K - 4000K 50K - 5000K	UNV - 120-277V HVU - 277-480V	GS - Glass lens PC - PC Lens

PERFORMANCE SUMMARY





Item #	Watts	Lumens	CCT	CRI	Volts	Dimming	HID Equiv.
LT-WAK-30W-50K-UNV-PC	30W	3600	5000K	70+	120-277V	1-10V	175W
LT-WAK-30W-50K-UNV-GS	30W	3600	5000K	70+	120-277V	1-10V	175W
LT-WAK-50W-50K-UNV-PC	50W	6000	5000K	70+	120-277V	1-10V	250W
LT-WAK-50W-50K-UNV-GS	50W	6000	5000K	70+	120-277V	1-10V	250W
LT-WAK-60W-50K-UNV-PC	60W	7200	5000K	70+	120-277V	1-10V	250W
LT-WAK-60W-50K-UNV-GS	60W	7200	5000K	70+	120-277V	1-10V	250W
LT-WAK-100W-50K-UNV-PC	100W	12000	5000K	70+	120-277V	1-10V	400W
LT-WAK-100W-50K-UNV-GS	100W	12000	5000K	70+	120-277V	1-10V	400W
LT-WAK-120W-50K-UNV-PC	120W	14400	5000K	70+	120-277V	1-10V	400W
LT-WAK-120W-50K-UNV-GS	120W	14400	5000K	70+	120-277V	1-10V	400W
LT-WPK-60W-50K-UNV-PC	60W	7200	5000K	70+	120-277V	1-10V	250W
LT-WPK-60W-50K-UNV-GS	60W	7200	5000K	70+	120-277V	1-10V	250W
LT-WPK-100W-50K-UNV-PC	100W	12000	5000K	70+	120-277V	1-10V	400W
LT-WPK-100W-50K-UNV-GS	100W	12000	5000K	70+	120-277V	1-10V	400W
LT-WPK-120W-50K-UNV-PC	120W	14400	5000K	70+	120-277V	1-10V	400W
LT-WPK-120W-50K-UNV-GS	120W	14400	5000K	70+	120-277V	1-10V	400W

DIMENSIONS

LT-WPK




LT-WAK



*Package dimensions

380 * 280 * 240 mm

PHOTOMETRICS

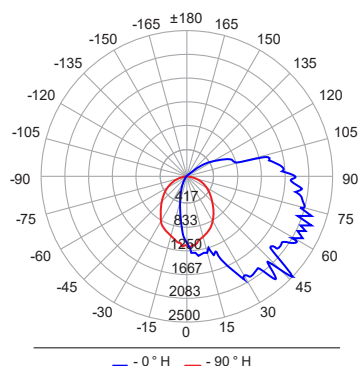

WMG-2C-50K-U