



LI-TIAN LIGHTING

LED WALLPACK LIGHT

DESCRIPTION

- Latest generation of LED chips delivers a similar light output to a 175, 250, or 400W metal halide using only 1/3 the energy consumption
- Full cutoff optics prevents neighborhood light trespass; item is night sky friendly
- Fits most standard J-boxes

LISTINGS

- ETL Listed for wet locations(UNDER REVIEW)
- IP65 Rated
- DesignLights Consortium® Qualified - meets DLC requirements for efficacy and lumen maintenance(UNDER REVIEW)

LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K/5000K CCT
- CRI: 70+

ELECTRICAL

- Input voltage: 120-277 or 277-480V
- Power Factor: >.90
- THD: <20%

CONSTRUCTION

- Die-cast aluminum body
- Heat and impact resistant polycarbonate optics
- 1/2" NPS entry points for conduit and accessories
- -40°F to 104°F (-40°C to 40°C) operating temperature

WARRANTY

- 5 year limited warranty



APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security



ORDERING INFORMATION


Model	Package	CCT	Voltage	Lens
LT-WPK-JZ	60W, 7800LM 120W, 15600LM	40K - 4000K 50K - 5000K	UNV - 120-277V HVU - 277-480V	PC - PC Lens

PERFORMANCE SUMMARY


Item #	Watts	Lumens	CCT	CRI	Volts	HID Equiv.
LT-WPK-JZ-60W-40K-UNV	60W	7800	4000K	70+	120-277V	250W
LT-WPK-JZ-60W-50K-UNV	60W	7800	5000K	70+	120-277V	250W
LT-WPK-JZ-120W-40K-UNV	120W	15600	4000K	70+	120-277V	400W
LT-WPK-JZ-120W-50K-UNV	120W	15600	5000K	70+	120-277V	400W

DIMENSIONS

60W

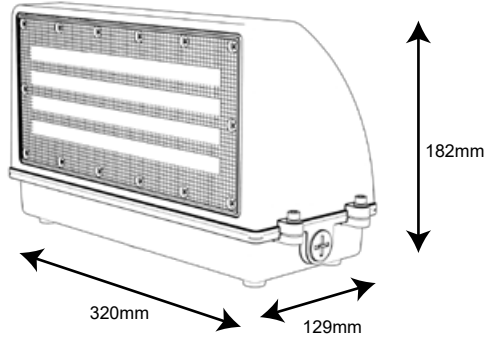

120W

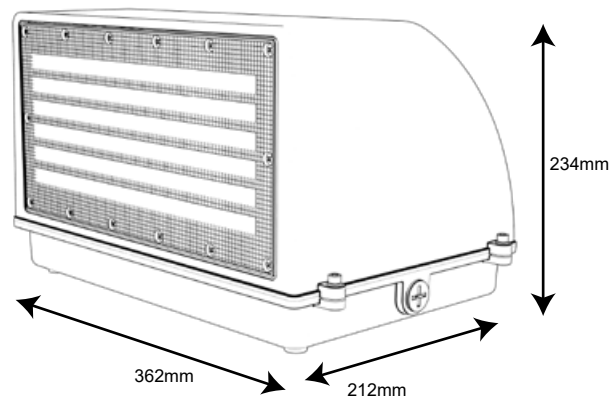

*Package dimensions

60W : 340 * 170 * 230 mm

120W : 380 * 260 * 280 mm

PHOTOMETRICS

