

LED Wall Sconce

The Poplar outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Poplar is available in three sizes (20cm,40cm,60cm) to meet architectural scale; ideal for way-finding and general outdoor illumination. The Poplar features energy-efficient, fully dimmable integrated LED lamping(Dimming options). Available in two finishes: Bronze and Oak grain.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

SPECIFICATIONS





DELIVERED LUMENS	150 600 900
WATTS	5 20 30
VOLTAGE	220-240V(Options120-277V), with integral transient 2kV surge protection (driver)
DIMMING	0-10(Options)
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
CCT	2700K, 3000K
CRI	90+
COLOR	Bronze and Oak grain
WET LISTED	IP65
GENERAL LISTING	CE
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	3 Years
Finishing options	Poplar grape willow Plum



ORDERING INFORMATION **LT-BY-927-5W-M-NV**

LT-BY	CRI / CCT	POWER	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	5W	D DIFFUSE	B BRONZE	NV 220-240V	S SYMMETRIC	UNV 120V-277V
930	90 CRI, 3000K	20W 30W		M Oak grain			(0-10VDimming)

LED Wall Sconce

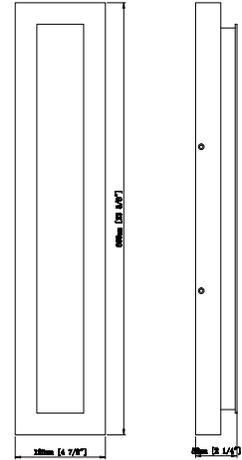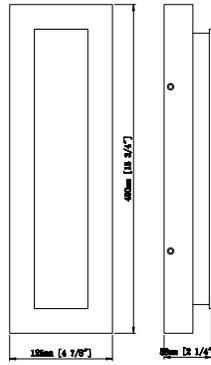



Total Lumen Output: 900
 Total Power: 30
 Luminaire Efficacy: 30
 Color Temp: 3000K
 CRI: 90
 BUG Rating: B0-U3-G1

